




Package Outline Drawing

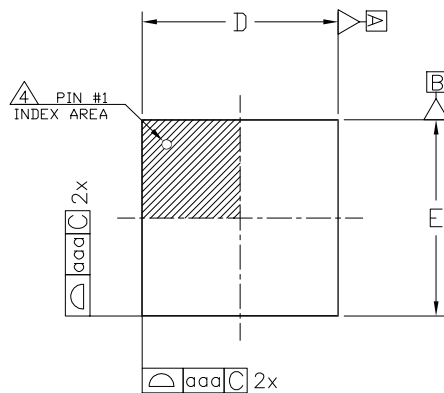

[TOP VIEW]

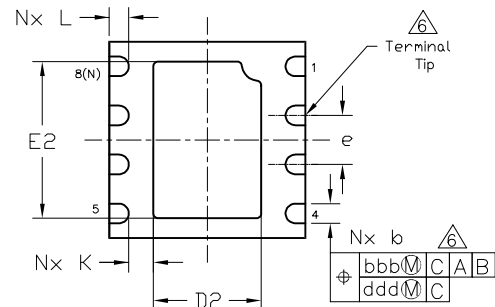

[BOTTOM VIEW]

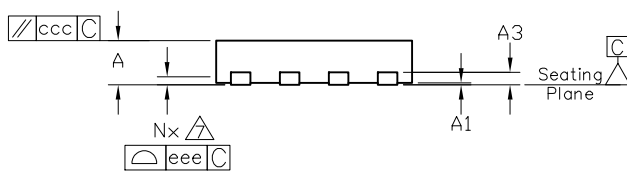

[SIDE VIEW]


NOTES:

1. Dimensioning and tolerancing conform to ASME Y14.5-2009.
2. All dimensions are in millimeters.
3. N is the total number of terminals.


4 The location of the marked terminal #1 identifier is within the hatched area.

5. NE refers to the maximum number of terminals on E side.


⚠ Dimension b applies to the metallized terminal and is measured between 0.15mm and 0.30mm from the terminal tip. If the terminal has a radius on the other end of it, dimension b should not be measured in that radius area.

 Coplanarity applies to the terminals and all other bottom surface metallization.

Dimension Table					
Symbol	Thickness	Min	Nominal	Max	Note
A		0.41	0.45	0.50	
A1		0.00	0.02	0.05	
A3		---	0.127 Ref.	---	
b		0.15	0.20	0.25	6
D		2.00 BSC			
E		2.00 BSC			
e		0.50 BSC			
D2		1.00	1.10	1.20	
E2		1.50	1.60	1.70	
K		0.20	---	---	
L		0.10	0.20	0.30	
aaa		0.05			
bbb		0.10			
ccc		0.10			
ddd		0.05			
eee		0.08			
N		8			3
NE		4			5

Package Size: 2.0x2.0x0.45mm	Remarks:
Exposed Pad Size: 1.1x1.6mm	Date: 2022/06/28
PIN Pitch: 0.5mm	Title: 8TR-2x2-8L-POD1-P220628
Number of Pad: 9	Version: Rev1.0
<i>BeRex Confidential</i>	 BEREX

Land Pattern Recommendation

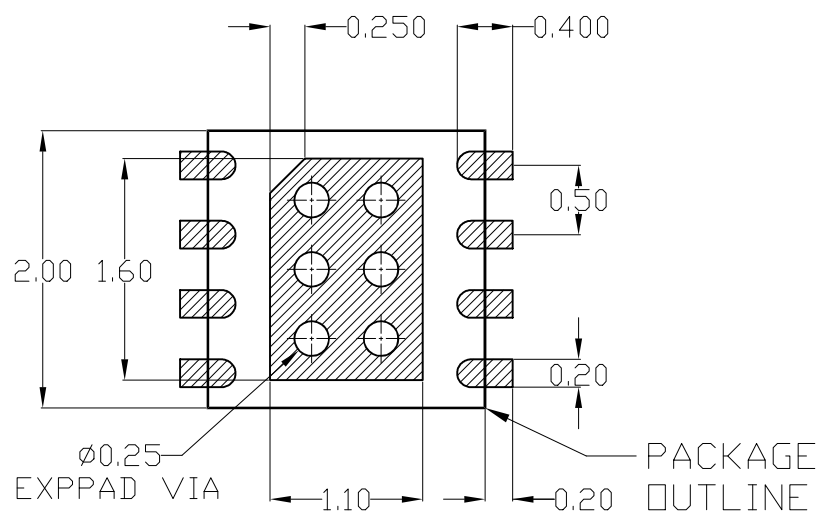

NOTES:

1. All dimensions are in millimeters.

Exposed Pad Size: 1.1x1.6mm
PIN Pitch: 0.5mm
Number of Via: 6
Via diameter: 0.25mm
Exposed Pad via pitch: 0.5mm

BeRex Confidential

Remarks:

Date: 2022/06/28

Title: 8TR-2x2-8L-POD1-P220628

Version: Rev1.0

