




# Package Outline Drawing

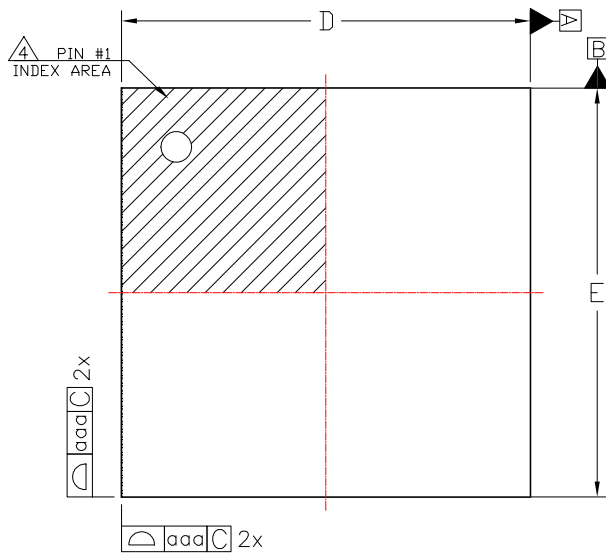

[TOP VIEW]

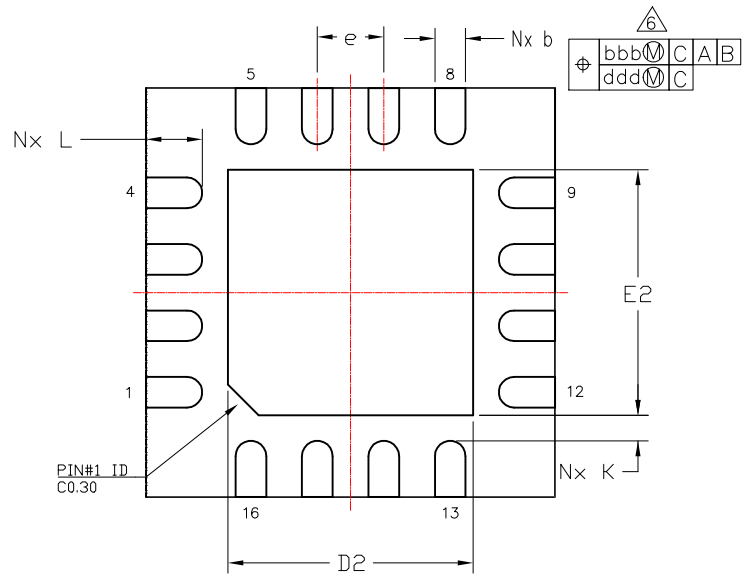

[BOTTOM VIEW]

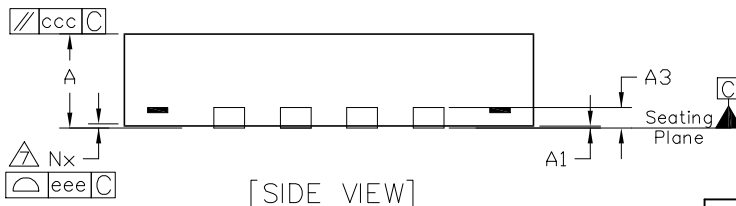

[SIDE VIEW]

## NOTES:

1. Dimensioning and tolerancing conform to ASME Y14.5-2009.
2. All dimensions are in millimeters.
3. N is the total number of terminals.
4. The location of the marked terminal #1 identifier is within the hatched area.
5. ND and NE refer to the number of terminals each D and E side respectively.
6. Dimension b applies to the metallized terminal and is measured between 0.15mm and 0.3mm from the terminal tip. If the terminal has a radius on the other end of it, dimension b should not be measured in that radius area.
7. Coplanarity applies to the terminals and all other bottom surface metallization.

Dimension Table					
Symbol	Thickness	Min	Nominal	Max	Note
A		0.80	0.90	1.00	
A1		0.00	0.02	0.05	
A3		---	0.203 Ref.	---	
b		0.25	0.30	0.35	6
D		4.00 BSC			
E		4.00 BSC			
e		0.65 BSC			
D2		2.35	2.40	2.45	
E2		2.35	2.40	2.45	
K		0.20	---	---	
L		0.45	0.55	0.65	
aaa		0.05			
bbb		0.10			
ccc		0.10			
ddd		0.05			
eee		0.08			
N		16			3
ND		4			5
NE		4			5
NOTES		1,2			

Package Size: 4.0x4.0x0.9mm  
Exposed Pad Size: 2.40x2.40mm  
PIN Pitch: 0.65mm  
Number of Pad: 16

Remarks:

Date: 2022/05/25


Title: BSW\_4x4\_16L\_P220525v10

Version: Rev1.0

**BeRex Confidential**



# Land Pattern Recommendation

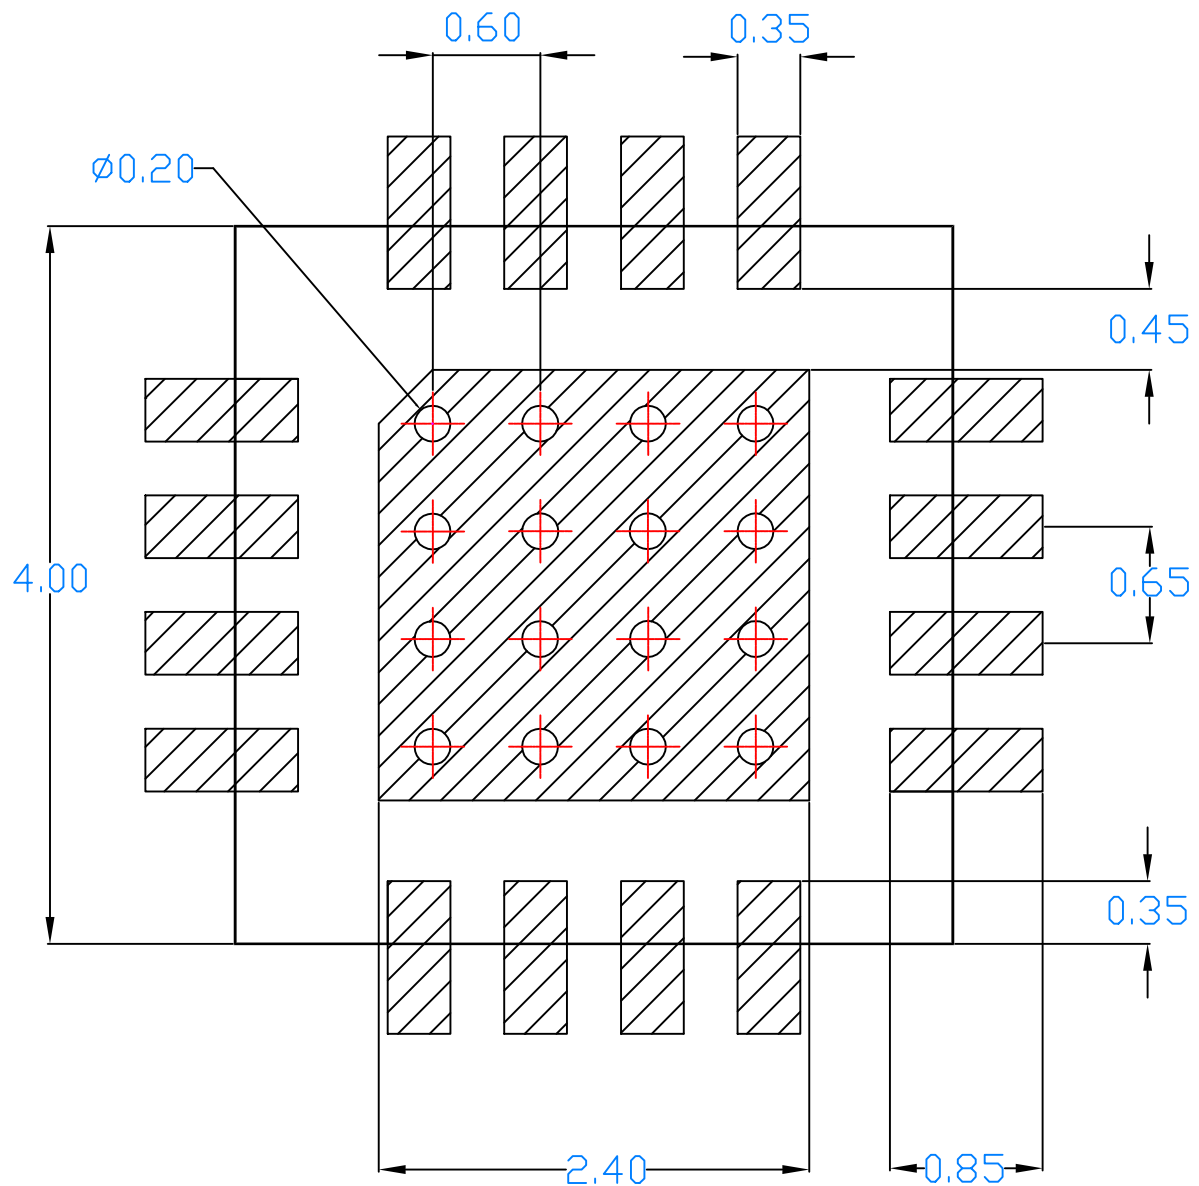

NOTES:

- 1.All dimensions are in millimeters.

Exposed Pad Size: 2.4x2.4mm
PIN Pitch: 0.65mm
Number of Via: 16
Via diameter: 0.2mm
Exposed Pad via pitch: 0.6mm

***BeRex Confidential***

Remarks:

Date: 2022/04/15

Title: BSW-4x4-16L-LP220415A

Version: Rev1.0



BEREX